

# New Product Bulletin

# EXPLORA L.E.D Driving Light Bars



**NARVA**<sup>®</sup>  
THE VISION TO GO FURTHER

## SUPERIOR CONSTRUCTION

- One piece die cast aluminium housing designed without end caps provides optimum sealing and heat dissipation
- Virtually unbreakable hard coated polycarbonate lens
- Stainless steel brackets and mounting hardware (SUS 304)
- Fully sealed and submersible (IP68 & IP69K)
- Integrated Genuine Nitto Breather Vent
- Pre-wired weatherproof DT connector

**14" Single Row**  
12 L.E.Ds  
**Part No: 72272**

**22" Single Row**  
18 L.E.Ds  
**Part No: 72274**

**22" Double Row**  
36 L.E.Ds  
**Part No: 72282**



Nitto Breather Vent




Stainless Steel Brackets




# New Product Bulletin

**14" SINGLE ROW L.E.D LIGHT BAR WITH LICENSE PLATE BRACKET**  
PART NO. 72273

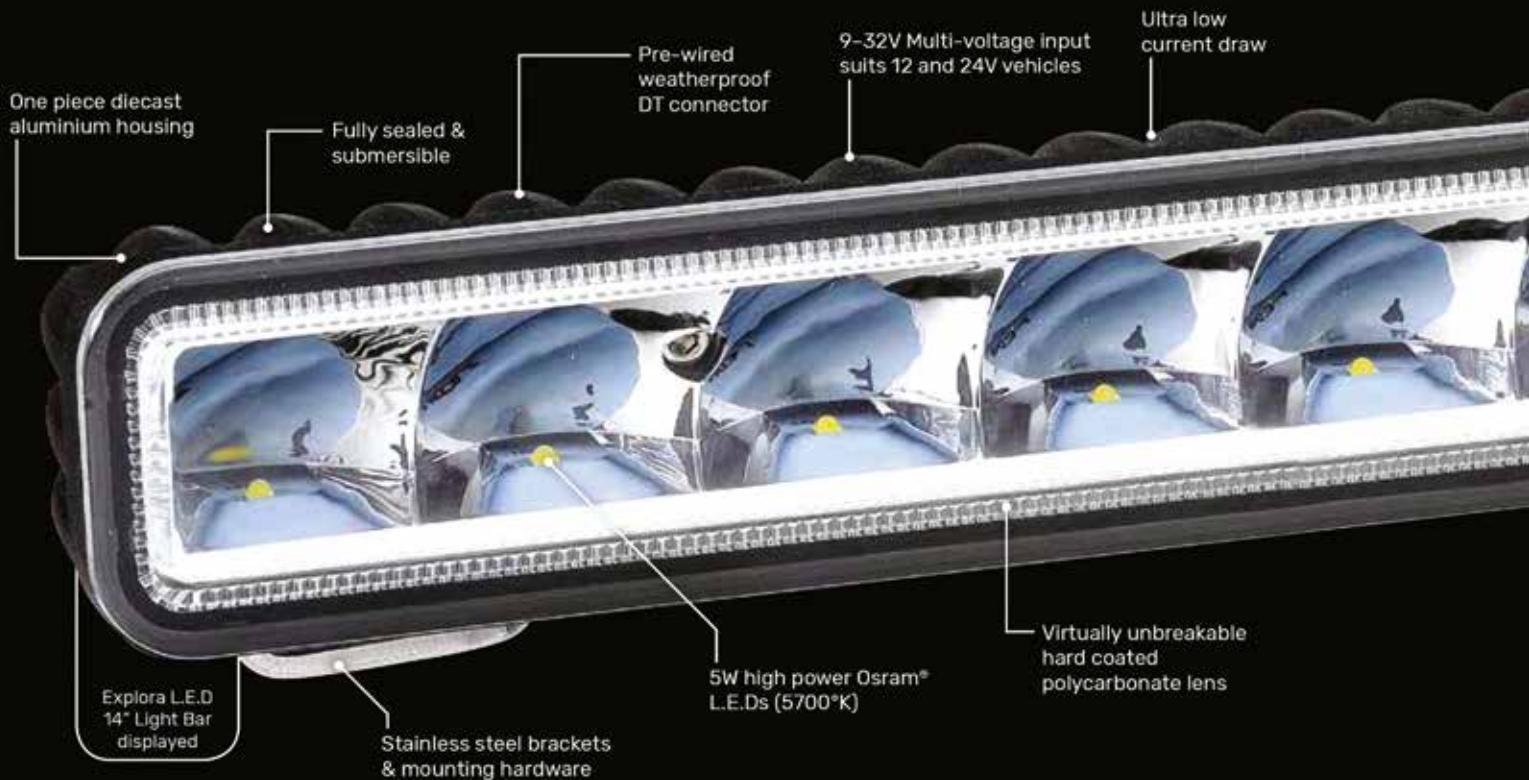

## SPECIFICATIONS

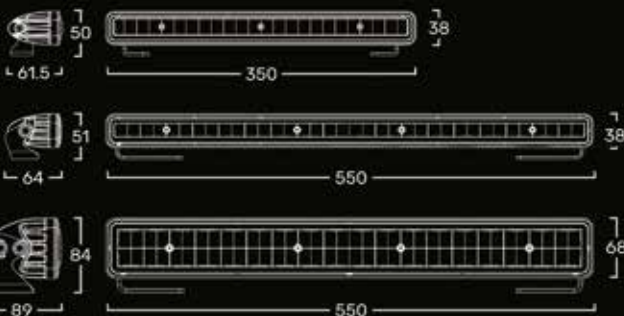

Dimensions are measured in mm with 2 'L' mounting brackets.

**INPUT VOLTAGE RANGE:** 9-32V  
**L.E.D TYPE:** 5 Watt Osram® DURIS-P8 L.E.Ds  
**OPERATING TEMP:** -30°C to 65°C  
**COLOUR TEMP:** 5700°K  
**HEAT MANAGEMENT:** Active Thermal Management System (ATMS)  
**EMC:** ECE R10  
**IP RATING:** IP68 & IP69K

	14" SINGLE PART NO. 72272	22" SINGLE PART NO. 72274	22" DOUBLE PART NO. 72282
<b>CURRENT DRAW</b>	2.6A at 12V 1.3A at 24V	3.7A at 12V 1.9A at 24V	6.6A at 12V 3.0A at 24V
<b>L.E.D POWER:</b>	60 Watts	90 Watts	180 Watts
<b>LUMENS:</b>	6,000 raw 2,377 effective	9,000 raw 3,589 effective	18,000 raw 6,217 effective
<b>WEIGHT:</b>	650g	1100g	2420g